



Low Direct Ø83

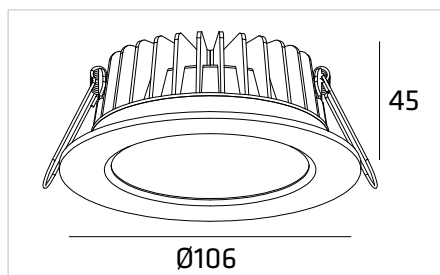

IMPORTANT INFORMATION:



1. Please read this instruction carefully before installation and keep it for future reference.
2. Please conform to the instruction of equipment and installed by professional.
3. Make sure correct voltage applied before use and keep away from heat and vibration source.
4. The light source of this luminaire is not replaceable. When the light source reaches its end of life the whole luminaire shall be replaced.
5. The product is not suitable for any oil pollution ambient or related applications.
6. This product contains a light source of energy efficiency class **G**.
7. It shall not be disposed of as unsorted municipal waste.
8. For indoor use only.

MAIN PARAMETER:

Product	241904	241905
Rated Voltage	AC 220-240V 50/60Hz	AC 220-240V 50/60Hz
LED watt	9W	9W
System eff	11W	11W
LED	Samsung SMD LED	Samsung SMD LED
LED Driver	Constant Current 300mA	Constant Current 300mA
Color Temperature	3000K	3000K
Protection	Class II	Class II
Beam Angle	90°	90°
IP Rated	IP65	IP65
Operation Temperature	-25°C <ta<45°C	-25°C <ta<45°C
Cut-out	Ø83mm	Ø83mm
Product Size	Ø106mmxH45mm	Ø106mmxH45mm


INSTALLATION INSTRUCTIONS:

1. Always switch off the power supply before installation.
2. Make sure all parts are ready when open the box and prepare the installation tools the lighting needs.
3. Should be installed by qualified electricians.
4. If there is any damage on the housing or glass cover, should view it as disqualified product that cannot be used.
5. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

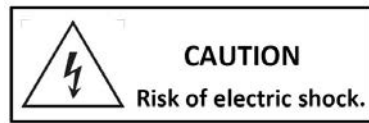


INSTALLATION STEPS:

1. Cut-out for the downlight.

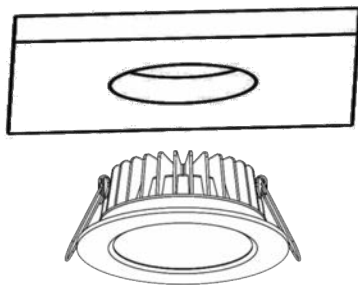

Cut-out: Ø83mm

2. Connect Mains supply to the quick connection terminal block of LED driver.
Slide the mounting spring clips into the ceiling cut-out and push the luminaire up into cutting hole. Ensure that it is securely located.

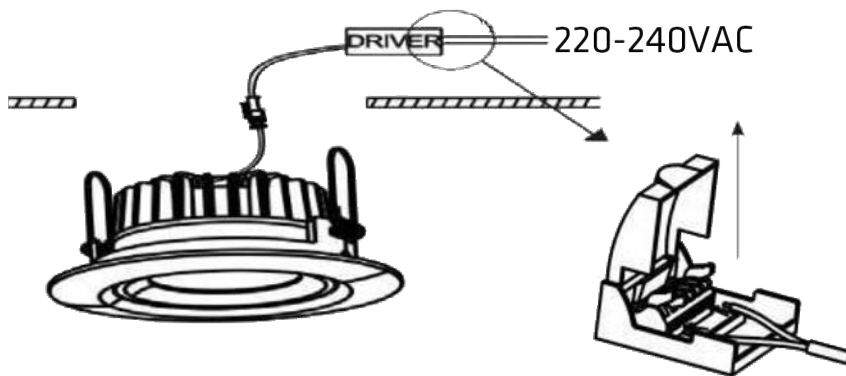

3. Switch on the power supply.

