



MICROSAFE®



FEATURES

- ✓ Very simple to use.
- ✓ Unique design.
- ✓ Display showing the actual temperature in the room in which the thermostat or external sensor is located.
- ✓ Adjustment up/down of temperature controlled by button.
- ✓ Sparkless relay offers superior reliability, low heat generation and virtually silent switching.

Microsafe® MTemp, Thermostat

The MTemp shows the precise temperature on the digital display.

The temperature is simple to adjust using the + and - buttons.

The display shows the actual temperature in the room in which the thermostat or external sensor is located. If + / - is pressed, the display switches to showing the set temperature and then returns to the actual temperature. Red LED indicates that heating is in progress.

Can be used with any floor sensor (see parameter menu)
The MTemp is available in a 1/2-pole 3600/2300 VA version.



PARAMETER MENU

- Menu > Press - and ON/OFF simultaneously
- Scroll > Press ON/OFF button
- Select > Press +/-
- Reset > Press ON/OFF, + and - simultaneously

MENU	FUNCTION	VALUE
PA	Floor sensor selection / type	0=47k, 1=12k 3=10k, 2=15k
Pb	Display brightness	0-50

The perfect project thermostat

PART NO.	NAME	
5450340	MTemp	16A/2300VA 2P
5450341	MTemp	16A/3600VA 1P

TECHNICAL DATA		
Physical dimensions:	Conforms to RS16	Temp./Power: 5-40°C
Voltage:	230 VAC +10/-20%	Floor sensor: Own terminal (Fig. 1)
Max. load:	2,300/3,600 VA	Fuse: 16 A

Floor sensor (MGF47k, Part No. 5450304) included.

WIRING DIAGRAM

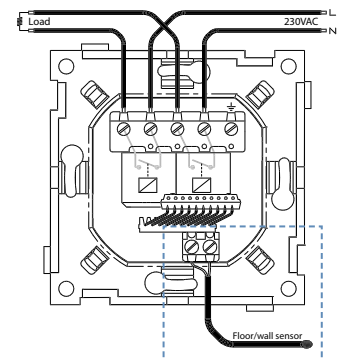


Fig. 1

MANUFACTURER
CTM Lyng AS
Tel: +47 7283 1611
www.ctmlyng.no