
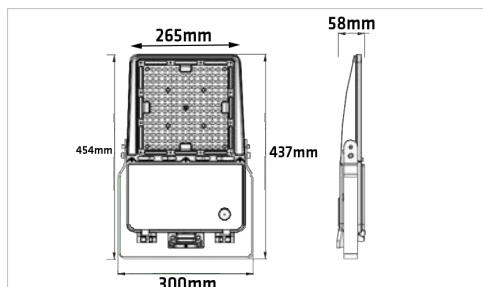


Sola SMD (Big Lens)



IMPORTANT INFORMATION:



1. Please read this instruction carefully before installation and keep it for future reference.
2. Please conform to the instruction of equipment and installed by professional.
3. Make sure correct voltage applied before use and keep away from heat and vibration source.
4. The light source of this luminaire is not replaceable. When the light source reaches its end of life the whole luminaire shall be replaced.
5. The product is not suitable for any oil pollution ambient or related applications.
6. This product contains a light source of energy efficiency class **D**.
7. It shall not be disposed of as unsorted municipal waste.
8. For indoor and outdoor use.

MAIN PARAMETER:

Product	508016	510006
Rated Voltage	AC 100-277V 50/60Hz	AC 100-277V 50/60Hz
LED watt	67,5W	90W
System eff	75W	100W
LED	Lumileds SMD 3030 LED	Lumileds SMD 3030 LED
LED Driver	Constant Current 1,5A	Constant Current 2,1A
Color Temperature	4000K	4000K
Protection	Class I	Class I
Beam Angle	80x150°	100°
IP Rated	IP65	IP65
Operation Temperature	-40°C <ta<50°C	-40°C <ta<50°C
Product Size	300mmx454mmx58mm	300mmx454mmx58mm

INSTALLATION INSTRUCTIONS:


1. Always switch off the power supply before installation.
2. Make sure all parts are ready when open the box and prepare the installation tools the lighting needs.
3. Should be installed by qualified electricians.
4. If there is any damage on the housing or glass cover, should view it as disqualified product that cannot be used.
5. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

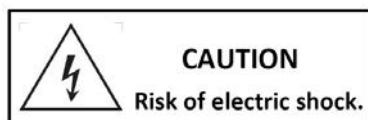

Art nr. 508016/510006

INSTALLATION STEPS:



1. Select the required position for the luminaire. Ensure the fixings are suitable to withstand the weight of this product.

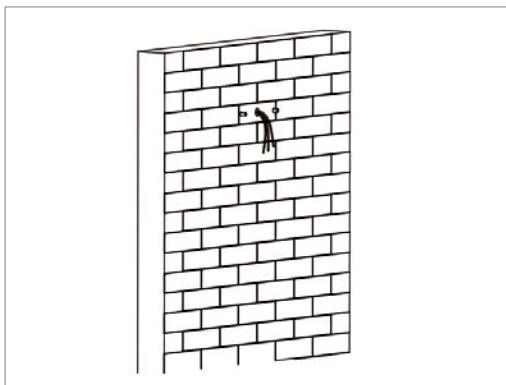

2. Provide a power supply to the luminaire using a suitable cable. Connect the mains supply to the luminaire.

- Mains supply LIVE (Brown) - L
- Mains supply NEUTRAL (Blue) - N
- Mains supply EARTH (Yellow/Green) - E

IMPORTANT: These luminaires are Class I and must be earthed.

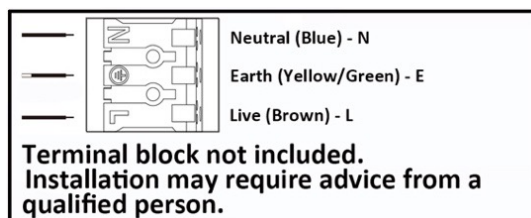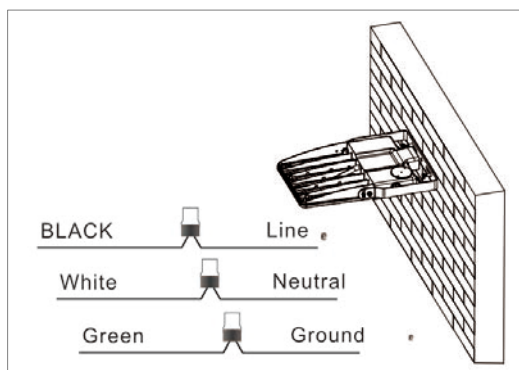

3. Adjust angle to required position. Switch on the power supply.

