




# FDV



## Bulkhead Øyelokk

|            |               |
|------------|---------------|
| El nr      | 32 416 06     |
| Article nr | 261205        |
| EAN        | 7090015379003 |



### Lysteknikk

|                          |                 |
|--------------------------|-----------------|
| Type lyskilde            | SMD LED         |
| Spenning                 | 230VAC 50/60Hz  |
| Watt                     | 8W              |
| Systemeffekt (W)         | 10W             |
| Effektiv lysstrøm (lm)   | 807lm           |
| Effekt                   | 80lm/W          |
| Fargetemperatur          | 3000K           |
| Fargegjengivelse (CRI)   | Ra>80           |
| MacAdams faktor          | SDCM≤3          |
| Levetid (IEC 62717 Ta25) | 50 000h L80B50  |
| Lysspredning             | 110°            |
| Driftstemperatur         | -20°C <ta< 45°C |

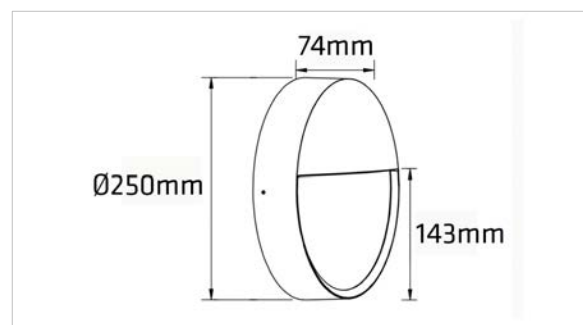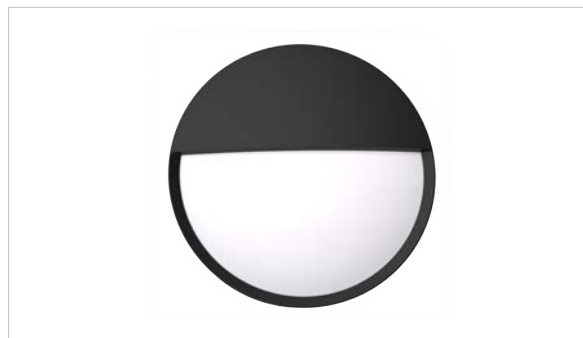

### LED Driver

|             |                     |
|-------------|---------------------|
| Type        | Dimbar faseavsnitt  |
| Driftsstrøm | 150mA Konstantstrøm |

### Beskyttelse

|                  |          |
|------------------|----------|
| Isolasjonsklasse | Klasse I |
| IP-grad          | IP65     |

### Materialer og overflater

|            |                        |
|------------|------------------------|
| Armaturhus | Aluminium die-cast, PC |
| Farge      | Sort (RAL9005)         |

### Energi og godkjenning

|                                      |                                                                                          |
|--------------------------------------|------------------------------------------------------------------------------------------|
| Inneholder lyskilde med Energiklasse | G                                                                                        |
| Godkjenning                          | CE, RoHS                                                                                 |
| Safety standard                      | EN 60598-1:2015+A1:2018, EN 60598-2-1:1989, EN 62031:2008+A1:2013+A2:2015, EN 62493:2015 |
| EMC standard                         | EN 55015:2013+A1:2015, EN 61000-3-2:2014, EN 61547:2009, EN 61000-3-3:2013               |

### Montering/Tilkobling

|           |                          |
|-----------|--------------------------|
| Montering | Utenpåliggende, Utendørs |
| Kabling   | skruklemme               |

### Dimensjoner (mm)

|              |          |
|--------------|----------|
| Høyde (H)    | 74 mm    |
| Diameter (D) | Ø250 mm  |
| Vekt         | 1,10 kgs |

### Forpakning

|                   |                |
|-------------------|----------------|
| Eske dimensjon    | 285x280x100 mm |
| Eske Vekt         | 1,50 kgs       |
| Kartong Dimensjon | 610x550x330 mm |
| Antall/Kartong    | 10 stk         |
| Kartong Vekt      | 15,00 kgs      |