
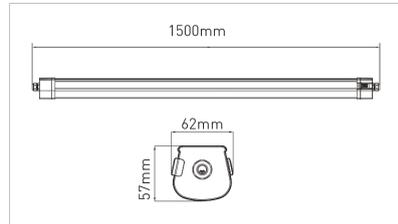
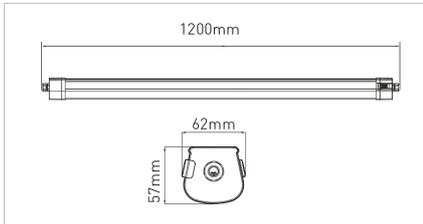


Dense Mini 1200mm/1500mm



IMPORTANT INFORMATION:



1. Please read this instruction carefully before installation and keep it for future reference.
2. Please conform to the instruction of equipment and installed by professional.
3. Make sure correct voltage applied before use and keep away from heat and vibration source.
4. The light source of this luminaire is not replaceable. When the light source reaches its end of life the whole luminaire shall be replaced.
5. The product is not suitable for any oil pollution ambient or related applications.
6. This product contains a light source of energy efficiency class **C**.
7. It shall not be disposed of as unsorted municipal waste.
8. For indoor and outdoor use under shelter.

MAIN PARAMETER:

Product	364004	365004
Rated Voltage	AC 220-240V 50/60Hz	AC 220-240V 50/60Hz
LED watt	19W-24W-30W-35W	26W-33W-38W-45W
System eff	35W	45W
LED	LED SMD 2835	LED SMD 2835
LED Driver	Constant Current 250mA	Constant Current 250mA
Color Temperature	4000K	4000K
Protection	Class I	Class I
Beam Angle	120°	120°
IP Rated	IP65	IP65
Operation Temperature	-20°C <ta<40°C	-20°C <ta<40°C
Product Size	1200mmx62mmx57mm	1500mmx62mmx57mm


INSTALLATION INSTRUCTIONS:

1. Always switch off the power supply before installation.
2. Make sure all parts are ready when open the box and prepare the installation tools the lighting needs.
3. Should be installed by qualified electricians.
4. If there is any damage on the housing or glass cover, should view it as disqualified product that cannot be used.
5. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

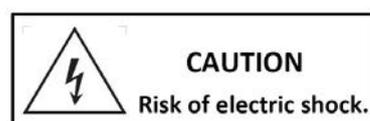


INSTALLATION STEPS:

Art nr. 364004/365004

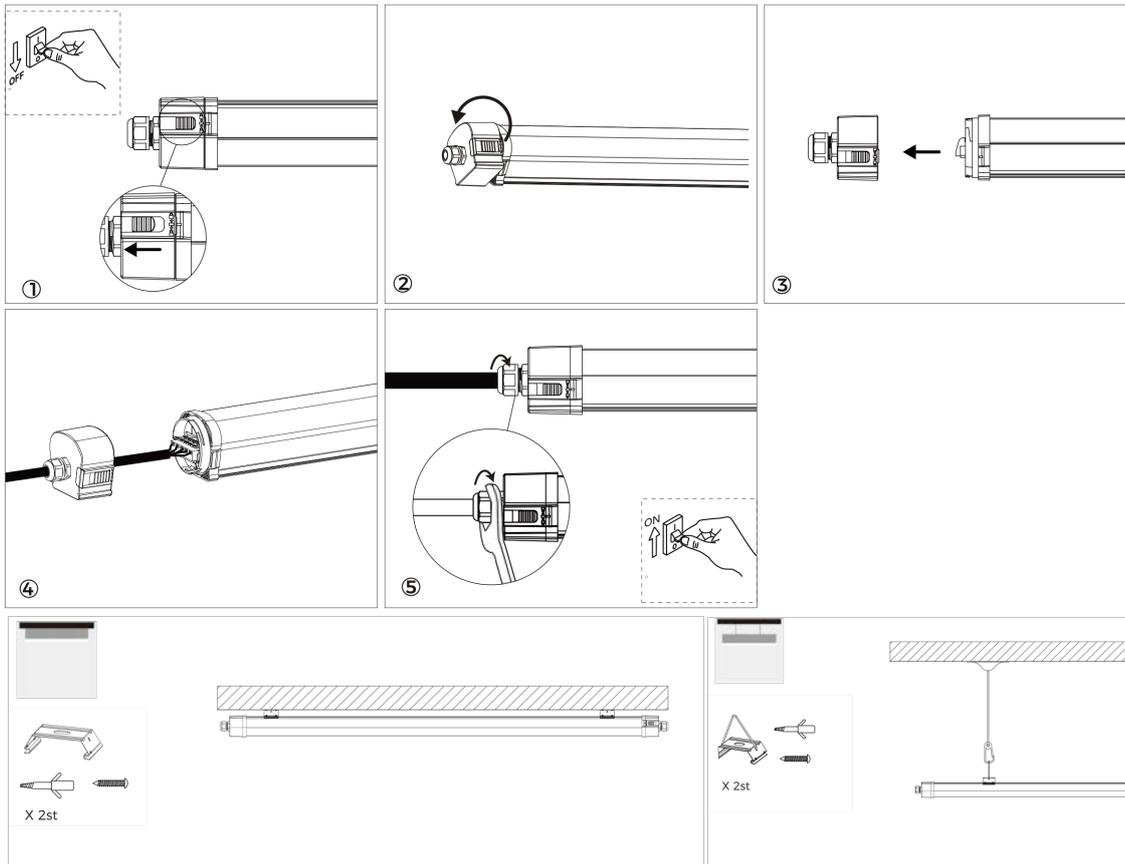

Power adjustable if default power is not applicable.

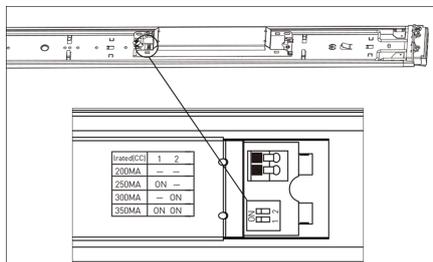

Rated	1200mm	1500mm	1	2
200mA	19W	26W	-	-
250mA	24W	33W	ON	-
300mA	30W	38W	-	ON
350mA	35W	45W	ON	ON

Linkable quantity

Linkable qty

INPUT	NX	NX	NX	NX
230vac	39(19W)	31(24W)	25(30W)	21(35W)
230vac	29(26W)	23(33W)	20(38W)	17(45W)

Circuit breakers

	B10	B16	C10	C16
35W	33	54	41	66
45W	20	32	33	53

The module could be taken out from A side

Note:
 A. The module fixing buckle is forced upward
 B. When the module is pulled out, make the luminous face down, the module is easier to pull out

mm	mm ²
1-2.5	12

5 wires

L2	NO
L1	NO
E	NO
N	NO
L3	NO