

FDV

Dense Mini 1200mm

El nr	32 416 09
Article nr	364004
EAN	7090015378990



Lysteknikk

Type lyskilde	SMD LED
Spenning	230VAC 50/60Hz
Watt	19W- 24W -30W-35W
Systemeffekt (W)	19W- 24W -30W-35W
Effektiv lysstrøm (lm)	3040-3840-4800-5600 lm
Effekt	160lm/W
Fargetemperatur	4000K
Fargegjengivelse (CRI)	Ra>80
MacAdams faktor	SDCM≤3
Levetid (IEC 62717 Ta25)	118 000h L80B50
Lysspredning	120°
Driftstemperatur	-20°C <ta< 40°C

LED Driver

Type	Ikke Dimbar
Driftsstrøm	250mA Konstantstrøm

Beskyttelse


Isolasjonsklasse	Klasse I
IP-grad (armaturhus)	IP65
IK-grad	IK08

Materialer og overflater

Armaturhus	Polycarbonate
Farge	Grå (RAL7035)

Energi og godkjenning

Inneholder lyskilde med Energiklasse	B
Godkjenning	CE, ENEC, RoHS, D mark
Safety standard	EN IEC 60598-2-1:2021
EMC standard	EN IEC 55015: 2019+A11:2020, EN 61547: 2009

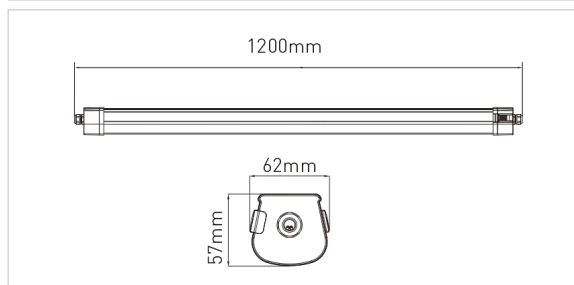

Maks. Armaturer per sikring

B10	B16	C10	C16
33	54	41	66

Montering/Tilkobling

Montering	Utenpåliggende
Kobling	Hurtigklemme
Anbefalt bruk kabel dia	10.2-12.8mm

Dimensjoner (mm)

Lengde (L)	1200 mm
Høyde (H)	57 mm
Bredde (W)	62 mm
Vekt	1,10 kgs

Forpakning

Eske dimensjon	1300x72x67 mm
Eske Vekt	1,30 kgs
Kartong Dimensjon	1330x300x200 mm
Antall/Kartong	6 stk
Kartong Vekt	8,00 kgs