



MICROSAFE®



FEATURES

- ✓ 25 A relay for panel installation.
- ✓ 868.100 MHz wireless communication.
- ✓ Suitable for water heaters, lighting and other circuits you want to switch on/off.
- ✓ Max. 30 m range.
- ✓ 4 status LEDs.
- ✓ Simple pairing with wireless devices.

Microsafe® Relay R-T 25 A Radio

A relay for panel installation, for example to control a water heater, lighting and other circuits you want to switch on/off.


Supplied with an antenna.

Controlled wirelessly via 868.100 MHz.

Compatible with newer "R" / "Radio" products, e.g.:

- Mswitch Mic
- Mswitch Cooker Guard Sensor
- Mswitch On/Off
- Mswitch Timer
- Aqua Xpress Moisture Sensor
- Aqua Xpress Motion Sensor
- Mswitch Magnetic Switch
- mTouch Economy Switch
- mTouch HUB

WIRING DIAGRAM

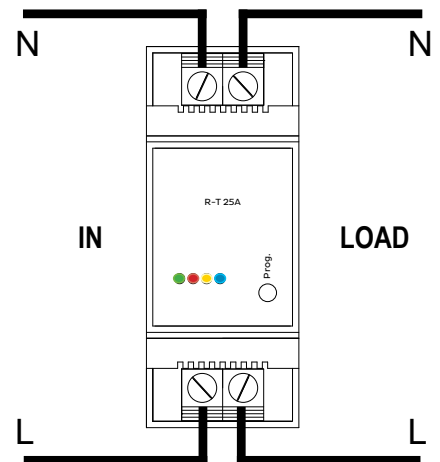

PART NO.	NAME
4150122	Relay R-T 25 A Radio

TECHNICAL DATA			
Operating voltage:	230 VAC (± 10%)	Max. cont. load:	25 A
Life:	20,000 switchovers	El. temp. protection:	75°C
RF:	868.100 MHz +5 dBm	RF range:	Up to 30 metres
Dimensions:	2 modules	Peak:	20 ms/200 µs 165 A/800 A

MANUFACTURER
CTM Lyng AS
Tel: +47 7283 1611
www.ctmlyng.no