



Aqua  Xpress



FEATURES

- ✓ Wireless communication.
- ✓ Simple to install.
- ✓ Controlled by 12 VDC pulse from valve driver.
- ✓ The valve driver runs off 230 V.

COMPATIBLE WITH

- ✓ Moisture Sensor
- ✓ Motion Sensor, wireless
- ✓ Master On/Off, wireless
- ✓ Timer, wireless

1/2" Solenoid Valve Local 3/4" con.


The Aqua Xpress Valve controls the water supply to individual rooms or relevant appliances. 3/4" connection with rotating nut.

The valve is supplied open and remains in the position in which it has been set until it receives a pulse with the opposite polarity.

Cable and plug for valve driver included.

Aqua Xpress is a flexible product that can be expanded to accommodate different needs and security levels.

WIRING DIAGRAM

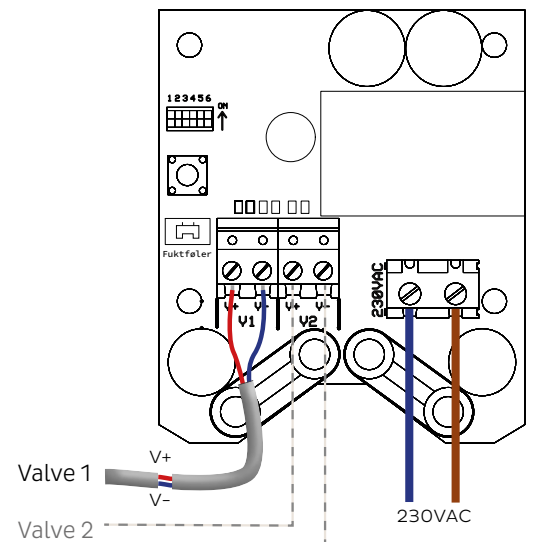

PART NO.	NAME
5648516 / 6251603	1/2" Solenoid Valve Local 3/4" connection

VALVE		
Dimensions:	HxWxL 84 x 45 x 97 mm	Operating voltage: 12 VDC
Coil:	Bistable	Pressure/Flow: 0.15–10bar / 42l min
Connection:	IN: 3/4" female thread with rotating nut	OUT: 3/4" male thread

VALVE DRIVER		
Dimensions:	HxWxD 95 x 73 x 37 mm	Frequency: 868,100 MHz
Operating voltage:	230 VAC +10/-20%	Transmitter power: +5 dBm

MANUFACTURER
CTM Lyng AS
 Tel: +47 72 83 16 11
www.ctmlyng.com