



**MICROSAFE®**



**FEATURES**

- ✓ Complete with pre-connected sensor on mounting bracket and internal wiring to corridor relay.
- ✓ Up to 6 sensors can be used with the same relay.
- ✓ Full flexibility with fast, simple installation.
- ✓ 1 sec. - 5 hours turn-off time.

Did you know that renovating some corridors in a hotel or school, for example, will pay for itself in a few months?


**TIPS!** Up to 6 different sensors can be connected to the same relay to cover all area types.

See [www.ctmlyng.no](http://www.ctmlyng.no) for the full range of sensors.

**Microsafe® Corridor Relay  
For long areas**

The corridor relay package comes complete with one or more sensors on brackets, ready connected to a relay with a choice of cable lengths.

The combination is ready to use, with our familiar relay technology in Microsafe® products and quality sensors.

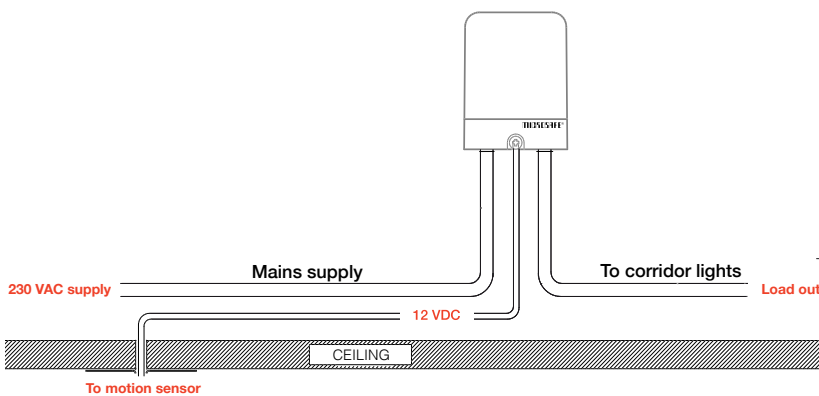

PART NO.	NAME	
1403890	Corridor relay 40 m	1 middle bracket with 2 x 20 m sensor
1403891	Corridor relay 20 m	1 end bracket with 20 m sensor
1403892	Corridor relay 2x20 m	2 end brackets with 20 m sensors
1418295	Corridor relay 20 m IP65	1 sensor with 20x6 m coverage

TECHNICAL DATA			
Voltage:	230 VAC +10/-20%	Max. load:	16 A
Internal power supply	12 VDC	Turn-off time:	1 sec - 5 hours

**MANUFACTURER**  
CTM Lyng AS  
Tel: +47 7283 1611  
[www.ctmlyng.no](http://www.ctmlyng.no)