

FDV

Comet Fire Quick Direct

El nr	32 173 50
Article nr	210584
EAN	7090015372721



Lysteknikk

Type lyskilde	LED (Sunpu COB LED)
Spenning	230VAC 50/60Hz
Watt	5,25W
Systemeffekt (W)	6,5W
Effektiv lysstrøm (lm)	587lm
Effekt	90lm/W
Fargetemperatur	2700K
Fargegjengivelse (CRI)	Ra>80
MacAdams faktor	SDCM<3
Levetid (IEC 62717 Ta25)	62 000h L80B50
Lysspredning	60°
Driftstemperatur	-25°C <ta< 45°C

LED Driver

Type	Dimbar faseavsnitt
Driftsstrøm	350mA Konstantstrøm

Beskyttelse


Isolasjonsklasse	Klasse II
IP-grad (armaturhus)	IP65

Materialer og overflater

Armaturhus	Aluminium die-cast
Farge	Matt hvit (RAL 9010)
Optikk/Reflektor	Glass/Alu

Energi og godkjenning

Inneholder lyskilde med Energiklasse	F
Godkjenning	CE, RoHS
Safety standard	EN 61347-2-13:2014+AMD1:2017, EN 6134701:2015
EMC standard	EN 55015:2013+A1:2015, EN 61547:2009, EN 61000-3-2:2014, EN 61000-3-3:2013

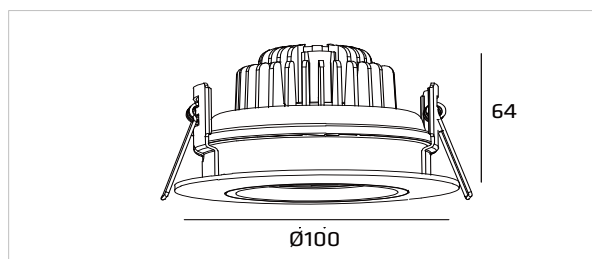

Godkjenning

Akkustikk	BS EN ISO 10140-2:2021, BS EN ISO 10140-3:2021
Brannklasse	BS EN 1365-2:2014

Montering/Tilkobling

Montering	Innfelling
Kobling	Hurtigklemme

Dimensjoner (mm)

Høyde (H)	64 mm
Diameter (D)	Ø100 mm
Innfellingsdiameter	Ø90-95 mm
Vekt	0,40 kgs

Forpakning

Eske dimensjon	130x120x80mm
Eske Vekt	0,42 kgs
Kartong Dimensjon	500x440x270 mm
Antall/Kartong	36 stk
Kartong Vekt	16,3 kgs