

FDV

LED Driver GLE dimbar faseavsnitt

El nr	32 292 96
Article nr	394800
EAN	7090015373483



Tekniske data

Spenning	230VAC 50/60Hz
Power factor (PF)	>0,90 @230V AC
Efficiency	>83%
Output current	950mA
Output voltage	9-42V
Output power	42W Max
Standby Power Consumption	<2W
Dimming range	0-100%
Open Circuit	Open Circuit voltage <59Vdc
Levetid	50 000 timer (IEC62717)
Driftstemperatur	-20°C - +45°C

LED Driver

Type	Fase-avsnitt
Driftsstrøm	700mA/750mA/800mA/850mA/ 900mA/950mA/1000mA/1050mA

Beskyttelse


Isolasjonsklasse	Klasse II
IP-grad	IP20

Materialer og overflater

Armatورهاus	Plastic
Farge	Hvit

Energi og godkjenning

Inneholder lyskilde med Energiklasse	
Godkjenning	CE, RoHS
Safety standard	ENEC:EN61347-1:2015, EN61347-2-13:2014/A1:2017, EN62384:2016 / A1:2009, EN61347-2-13:2014/A1: 2017, EN61347-1:2015, EN62493: 2015
EMC standard	EN55015, EN61000-3-2, EN61000-3-3, EN61000-4-2,3,4,5,6,11

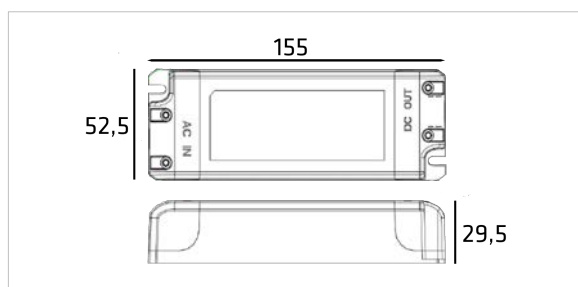

Maks. Armaturer per sikring

B10	B16	C10	C16
31	49	31	49

Montering/Tilkobling

Montering	Utenpåliggende
Kobling	1,5m ledning med Euro plugg

Dimensjoner (mm)

Lengde (L)	155 mm
Bredde (W)	52,50 mm
Høyde (H)	29,50 mm
Vekt	0,21 kgs

Forpakning

Kartong Dimensjon	385x285x210 mm
Antall/Kartong	40 stk
Kartong Vekt	8,86 kgs