

FDV


LED Driver GLE dimbar faseavsnitt

El nr	32 292 96
Article nr	394800
EAN	7090015373483



Tekniske data

Spenning	230VAC 50/60Hz
Power factor (PF)	≥0,90
Efficiency	≥87%
Output current	950mA
Output voltage	25-42V
Output power	40W Max
Minimum startup factor	28,5W
Dimming range	2%-100%
Omgivelsestemp	-20°C - 45°C
Levetid	50 000 timer (IEC62717)
Driftstemperatur	

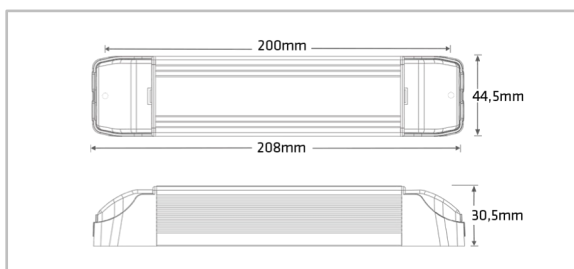

LED Driver

Type	Fase-avsnitt
Driftsstrøm	

Beskyttelse

Isolasjonsklasse	Klasse II
IP-grad	IP20

Montering/Tilkobling

Montering	Utenpåliggende
Kobling	1,5m ledning med Euro plugg

Materialer og overflater

Armaturhus	Plastic
Farge	Hvit

Energi og godkjenning

Inneholder lyskilde med Eneriklasse	
Godkjenning	CE, RoHS
Safety standard	IEC 61347-1, IEC 61347-2-13
EMC standard	EN 55015, EN 61000-3-2 Class C, IEC 61000-3-3, EN 61000-4-2,3,4,5,6,8,11, EN 61547

Dimensjoner (mm)

Lengde (L)	208 mm
Bredde (W)	44,50 mm
Høyde (H)	30,50 mm
Vekt	0,34 kgs

Forpakning

Kartong Dimensjon	720x420x250 mm
Antall/Kartong	100 stk
Kartong Vekt	35,0 kgs