


FDV

Optilux Bucket NG

El nr	32 364 01
Article nr	282504
EAN	7090015377788



Lysteknikk

Type lyskilde	SMD LED
Spennning	230VAC 50/60Hz
Watt	21W
Systemeffekt (W)	25W
Effektiv lysstrøm (lm)	2650lm
Effekt	106lm/W
Fargetemperatur	3000K
Fargegjengivelse (CRI)	Ra>80
MacAdams faktor	SDCM≤3
Levetid (IEC 62717 Ta25)	50 000h L80B50
Lysspredning	60°
Driftstemperatur	-25°C <ta< 40°C

LED Driver

Type	Dimbar faseavsnitt
Driftsstrøm	300mA Konstantstrøm

Beskyttelse


Isolasjonsklasse	Klasse I
IP-grad	IP54
IK-grad	IK08

Materialer og overflater

Armaturhus	Aluminium, PC
Farge	Matt hvit (RAL 9016)

Energi og godkjenning

Inneholder lyskilde med Energiklasse	F
Godkjenning	CE, RoHS
Safety standard	EN 60598-1:2015, EN 60598-2-1:1989, EN 62031:2008 +A1:2013 +A2:2015
EMC standard	EN 55015:2013+A1:2015, EN 61547:2009, EN 61000-3-2:2014, EN 61000-3-3:2013

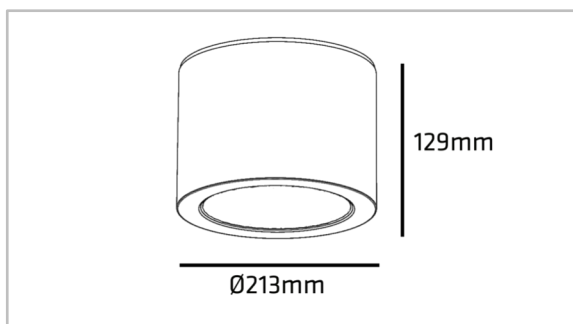

Montering/Tilkobling

Montering	Nedhengt
Kabling	Hurtigklemme

Dimensjoner (mm)

Bredde (W)	Ø213 mm
Høyde (H)	129 mm
Vekt	0,80 kgs

Forpakning

Eske dimensjon	250x250x160 mm
Eske Vekt	0,90 kgs
Kartong Dimensjon	530x530x520 mm
Antall/Kartong	12 stk
Kartong Vekt	12,00 kgs